

Initial Experiences Re-exporting Duplicate and Similarity Computations with an OAI-PMH Aggregator

Terry L. Harrison, Aravind Elango, Johan Bollen, Michael L. Nelson

Computer Science Department

Old Dominion University

Norfolk VA 23529

{tharriso,aelango,jbollen,mln}@cs.odu.edu

February 1, 2008

Abstract

The proliferation of the Open Archive Initiative Protocol for Metadata Harvesting (OAI-PMH) has resulted in the creation of a large number of service providers, all harvesting from either data providers or aggregators. If data were available regarding the similarity of metadata records, service providers could track redundant records across harvests from multiple sources as well as provide additional end-user services. Due to the large number of metadata formats and the diverse mapping strategies employed by data providers, similarity calculation requirements necessitate the use of information retrieval strategies. We describe an OAI-PMH aggregator implementation that uses the optional “<about>” container to re-export the results of similarity calculations. Metadata records (3751) were harvested from a NASA data provider and similarities for the records were computed. The results were useful for detecting duplicates, similarities and metadata errors.

1 Introduction

1.1 Problem Statement

The Open Archive Initiative Protocol for Metadata Harvesting (OAI-PMH) is a succinct, six verb protocol for the dissemination of metadata and represents the de-facto metadata exchange standard for today’s digital libraries [2]. Yet with over six million publicly available records, no general purpose tools exist to aid service providers in discovery of similarity among harvested records.

OAI-PMH increases the venerable problem of duplicates in union catalogues . Figures 1 and 2 depict scenarios where similar or duplicate records could be harvested. Figure 1 depicts a scenario where a service provider has twice harvested from Data Provider 2. Perhaps Aggregator 1 or Aggregator 2 have performed some metadata normalization, resulting in new OAI identifiers being assigned. “Sameness” becomes

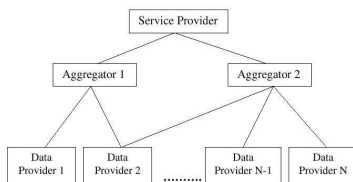


Figure 1: A possible scenario where duplicate records may be harvested via separate aggregators.




Figure 2: A possible scenario where duplicate records may be harvested through multiple descriptions of the same resource.

harder to compute. The $\langle \text{provenance} \rangle$ records can help identify duplicates, but they are optional. Figure 2 shows a service provider harvesting from two separate data providers. Both data providers have reviews of DJ Shadow LPs. Are the two reviews of “Entroducing” the same, or are they merely similar ?

1.2 Proposed Solution

A general purpose system devised to measure the similarity of OAI metadata records using information retrieval (IR) methodologies has many valuable uses. It may be used to weed out duplicate records that might otherwise be difficult to find by more traditional field matching methodologies. Also, it could be used to find additional versions of the same work, such as locating the short and long paper versions of the same project. Finally, this system could find similar documents in accordance with a predetermined threshold for use in recommendation systems such as those described in [1].

Such a “similarity engine” has been built to calculate similarity among harvested metadata records and thereby detect duplicate or similar documents. Our OAI-PMH aggregator incorporates these results, appending similarity data to metadata record requests. When issued a “GetRecord” request, the standard metadata for the identifier is returned along with a ranked list of similar documents. Ranking values are between 0 and 1, where 1 represents absolute similarity. This work is intended as a proof of concept and will require further optimization before dealing with the open corpus of OAI-PMH metadata (over 6.5 million records).

The Vector Space Model (VSM) [4] computes the cosine similarity of documents

based on the common terms present in the documents and their approximate importance. The importance of a term is gauged by its frequency of occurrence within a document and its sparse presence in the rest of the document collection. We use VSM as the primary mechanism for computing the similarity among the metadata. Salton describes the formula used as the best fully weighted system and recommends its use in the processing of text abstracts [4], which is similar to the text found in a metadata record. Our aggregator returns the identifier similarities within the context of the standard OAI-PMH “GetRecord” request. A service provider could use this data to further process its records (e.g. creating links to similar documents, deleting them, logging them for examination, etc.).

2 Methodology

For proof of concept purposes, NASA’s Langley Technical Reports Server (LTRS) [3] served as the repository to generate our test collection of 3751 records. To keep interface complexities to a minimum, only a predetermined (ten) number of matches (top similar documents and their similarity score) are returned and appended to the GetRecord response. Currently this number is set by our aggregator, but could easily be passed by the client as well. The following URL could yield the result shown in Figure 3.

`http://128.82.7.113:5180/perl/NASA_ltrs/?verb=GetRecord&metadataPrefix=oai_dc&identifi`

Use of the VSM permits the makeup of the record collection to affect the importance of each term in a given document. Given the large number of OAI-PMH records that would ultimately be harvested and evaluated, it would be extraordinarily costly to compare the full text documents. Instead, the metadata records are used. Individual service providers could be relieved of the expensive burden of calculating record similarity and may instead query (and even re-harvest) this data computed by the similarity engine.

Harvested records are cached in a hierarchical file structure. This structure is duplicated to store each file’s term list/frequencies (in a `tf_metadata` directory) and again to store each file’s term weights (in `weights_metadata`) after idf has been calculated. Since additional harvests will add additional records, this will require recalculating collection idf weights and similarities. Note that idf values are not cached as these values are calculated at runtime. Once the `tf_metadata` directory is created, it could be used for subsequent collection calculations. This does not hold for the `weight_metadata` files, for their values are influenced by the runtime idf weight calculations.

3 Results

LTRS was harvested in the first week of April 2003, yielding 3751 records. The similarity engine calculated the similarities of these 3751 records in just over 7 hours. This is taking into account document term parsing, document term frequency calculation, idf, term weights for each document and the similarity calculations per document into the total runtime. Dividing this by the number of documents we can estimate the cost of a single document to document comparison at approximately .0036 seconds.

Given this cost per similarity calculation, we can get an idea of how this would scale. To compare a document's similarity to all other documents requires an order $O(n^2)$ operation, even if we are only calculating the upper triangular portion of a document to document matrix $O(((n^2 - n)/2))$. Reducing this order of complexity is beyond the scope of this proof of concept, although we are currently investigating other techniques. The estimated similarity computation time for an increasing number of records is shown in table 1.

```

<?xml version="1.0" encoding="UTF-8" ?>
- <OAI-PMH xmlns="http://www.openarchives.org/OAI/2.0/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:schemaLocation="http://www.openarchives.org/OAI/2.0/ http://www.openarchives.org/OAI/2.0/OAI-
PMH.xsd">
  <responseDate>2003-04-22T19:41:59+00:00</responseDate>
  <request identifier="oai:ltrs.larc.nasa.gov:rdp3195.tex" verb="GetRecord"
  metadataPrefix="oai_dc">http%3A%2F%2F128.82.7.113%2F~terry%2Fperl%2FNASA_ltrs%2Findex.cgi</request>
- <GetRecord>
- <record>
- <header>
  <identifier>oai:ltrs.larc.nasa.gov:rdp3195.tex</identifier>
  <timestamp>2003-04-18</timestamp>
  <setSpec>24</setSpec>
</header>

- <metadata>
- <oai_dc:dc xmlns:oai_dc="http://www.openarchives.org/OAI/2.0/oai_dc/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:dc="http://purl.org/dc/elements/1.1/"
  xsi:schemaLocation="http://www.openarchives.org/OAI/2.0/oai_dc/
  http://www.openarchives.org/OAI/2.0/oai_dc.xsd">
  <dc:title>Buckling Behavior of Long Symmetrically Laminated Plates Subjected to Combined Loadings</dc:title>
  <dc:creator>Michael P. Nemeth</dc:creator>
  <dc:subject>24 |COMPOSITE MATERIALS</dc:subject>
  <dc:description>A parametric study is presented of the buckling behavior of infinitely long, symmetrically
  laminated anisotropic plates subjected to combined loadings. The loading conditions considered are axial
  tension and compression, transverse tension and compression, and shear. Results obtained using a special-
  purpose analysis, well-suited for parametric studies, are presented for clamped and simply supported plates.
  Moreover, results are presented for some common laminate constructions, and generic buckling design charts
  are presented for a wide range of parameters. The generic design charts are presented in terms of useful
  nondimensional parameters, and the dependence of the nondimensional parameters on laminate fiber
  orientation, stacking sequence, and material properties is discussed. An important finding of the study is that the
  effects of anisotropy are much more pronounced in shear-loaded plates than in compression-loaded plates. In
  addition, the effects of anisotropy on plates subjected to combined loadings are generally manifested as a phase
  shift of self-similar buckling interaction curves. A practical application of this phase shift is that the buckling
  resistance of long plates can be improved by applying a shear loading with a specific orientation. In all cases
  considered in the study, the buckling coefficients of infinitely long plates are found to be independent of the
  bending stiffness ratio the fourth root of D sub 11 divided by D sub 22.</dc:description>
  <dc:contributor>NASA Langley Research Center Hampton, VA 23665-5225</dc:contributor>
  <dc:date>May 1992</dc:date>
  <dc:type>NASA TP-3195</dc:type>
  <dc:identifier>ftp://techreports.larc.nasa.gov/pub/techreports/larc/92/tp3195.ps.Z</dc:identifier>
  <dc:identifier>http://techreports.larc.nasa.gov/ltrs/PDF/tp3195.pdf</dc:identifier>
  </oai_dc:dc>

</metadata>

- <about>
- <similar xmlns="http://128.82.7.113/~terry/perl/similar/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://128.82.7.113/~terry/perl/similar/ http://128.82.7.113/~terry/perl/similar.xsd">
  <masterDoc>oai:ltrs.larc.nasa.gov:rdp3195.tex</masterDoc>
  <match similarity="0.63670">oai:ltrs.larc.nasa.gov:NASA-95-tp3568</match>
  <match similarity="0.45610">oai:ltrs.larc.nasa.gov:NASA-97-tp3659</match>
  <match similarity="0.41763">oai:ltrs.larc.nasa.gov:NASA-2003-tp212131</match>
  <match similarity="0.32612">oai:ltrs.larc.nasa.gov:NASA-91-tm104060</match>
  <match similarity="0.32612">oai:ltrs.larc.nasa.gov:NASA-90-tm102716</match>
  <match similarity="0.28324">oai:ltrs.larc.nasa.gov:NASA-96-tp3587</match>
  <match similarity="0.23420">oai:ltrs.larc.nasa.gov:NASA-aiaa-98-1881</match>
  <match similarity="0.20897">oai:ltrs.larc.nasa.gov:NASA-2000-tp210538</match>
  <match similarity="0.19758">oai:ltrs.larc.nasa.gov:NASA-67-tnd4124</match>
  <match similarity="0.19623">oai:ltrs.larc.nasa.gov:NASA-aiaa-2001-1395</match>
  </similar>
</about>

</record>
</GetRecord>
</OAI-PMH>

```

Figure 3: Sample GetRecord⁵ response matching identifier.

Number of Records	Estimated Computation Time
100	17 seconds
1000	30 minutes-1 second
5000	12 hours-31 minutes-18 seconds
10000	2 days-2 hours-5 minutes-30 seconds
25000	13 days-1 hour-5 minutes-31 seconds
50000	52 days-4 hours-23 minutes-36 seconds
100000	208 days-17 hours-37 minutes-24 seconds
1000000	57 years-68 days-14 hours-51 minutes-36 seconds
6500000	2416 years-71 days-3 hours-45 minutes-2 seconds

Table 1: Estimated similarity computation time for an increasing number of records.

0.612268646499951	oai:ltrs.larc.nasa.gov:aiaa-90-3435
0.437324585723922	oai:ltrs.larc.nasa.gov:aiaa-89-3525
0.192198368428428	oai:ltrs.larc.nasa.gov:NASA-99-tm209128
0.191714168117722	oai:ltrs.larc.nasa.gov:conf-53-nato-agard
0.181853507628537	oai:ltrs.larc.nasa.gov:aiaa-92-4541
0.146374107816182	oai:ltrs.larc.nasa.gov:rdp4440.tex
0.139737036684787	oai:ltrs.larc.nasa.gov:aiaa-92-4145
0.124248293995541	oai:ltrs.larc.nasa.gov:aiaa-89-3312
0.115284832380858	oai:ltrs.larc.nasa.gov:NASA-2001-tm210644
0.102123657461834	oai:ltrs.larc.nasa.gov:conf-10-dasc

Table 2: Top ten matches in LTRS collection to file oai:ltrs.larc.nasa.gov:9-dasc.

The computed results were written to the file “similarities.txt”. The top ten collection matches and their nature of similarity are represented in (Appendix 2). To further process the results, a script was written which read “similarities.txt” and created a directory of results. Each file in it was named after a document and represented the top 10 (user definable) closest matches found, sorted high to low (table 2). With this built, the results were ready to be exported.

A fully functional OAI-PMH compliant aggregator was built that used the harvested records as its repository. Added to the data provider was the ability for it to serve the similarity information along with the other metadata normally provided. This modification was done within the scope of the OAI-PMH, thus maintaining OAI-PMH compliance. The similarity data is housed within an <about> section, which is available as an optional part of a GetRecord response. An XML schema was written for this container, as per OAI-PMH specifications (Appendix 1).

The average similarity calculation time between every two documents took approximately 0.0036 seconds. The result of 7,033,125 such similarities was stored in a 678.1 MB file (98.7 MB if compressed). The disk space for the harvested LTRS collection, tf_metadata and weight_metadata were 15.2 MB, 15.2 MB and 17.3 MB respectively.

4 Conclusions

We have demonstrated a proof of concept showing the use of information retrieval technologies with the OAI-PMH. This cross fertilization yields valuable results. At the data provider, similarity results may be used in detection of duplicates within the collection as well of the location of related documents (e.g. the Vol 1 / Vol 2 scenario). This information can be used for further grouping and association making. Through the interface demonstrated the user is provided with top ten (in our case) matches. A harvester could use this information to create links to these associated documents for the end user to peruse. Such links could direct users to alternative versions of documentation or to subsequent parts of the same report.

This project is only the beginning of a greater investigation into the similarity evaluation of OAI-PMH metadata records. The algorithm used here is $O(n^2)$, which poses great scaling issues. While there are many optimizations which may still be made, including parallelizing the calculations through a distributed calculation mechanism, in the end another algorithm must be employed.

References

- [1] Johan Bollen. Introduction to information retrieval: Lecture 2, March 2003.
- [2] H. Van de Sompel and C. Lagoze. Notes from the interoperability front: A progress report on the open archives initiative. In *in Proceedings of ECDL*, pages 144–157, Rome, Italy, September 2002.
- [3] Michael L. Nelson, JoAnne Rocker, and Terry L. Harrison. OAI and NASA scientific and technical information. *Library Hi-Tech*, 21, 2003.
- [4] G. Salton and C. Buckley. Term-weighting approaches in automatic text retrieval. Technical report, Cornell University, Ithaca, NY., 1988.

Appendix 1. XML schema for similarity in <about> container

```
<?xml version="1.0" encoding="UTF-8" ?>
<!-- W3C Schema generated by XMLSPY, modified by Terry Harrison -->
- <xs:schema targetNamespace="D:\Terry\aboutSchema4\" xmlns:xs="http://www.w3.org/2001/
  XMLSchema" xmlns="D:\Terry\aboutSchema4\" elementFormDefault="qualified"
  attributeFormDefault="unqualified">
- <xs:annotation>
  <xs:documentation>This XML Schema can be used to validate the "about" section in an OAI-
    PMH document Terry L. Harrison . April 22, 2003</xs:documentation>
</xs:annotation>
- <xs:element name="similar">
- <xs:complexType>
  - <xs:sequence>
    <xs:element name="masterDoc" maxOccurs="1" type="xs:string" />
    <xs:element ref="match" maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>
</xs:element>
- <xs:element name="match">
- <xs:complexType>
  - <xs:simpleContent>
    - <xs:extension base="xs:string">
      <xs:attribute name="similarity" type="xs:double" use="required" />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
</xs:element>
</xs:schema>
```


Appendix 2. Top 10 similar document pairs in LTRS collection

Rank	Titles of Similar Documents	Similarity	Relatedness
1	Space Environmental Effects on Spacecraft:LEO Materials Selection Guide (oai:ltrs.larc.nasa.gov:NASA-95-cr466lpt1) Space Environmental Effects on Spacecraft:LEO Materials Selection Guide (oai:ltrs.larc.nasa.gov:NASA-95-cr466lpt2)	0.9822	Part 1 and Part 2 of same report.
2	Nondimensional parameters and equations for Buckling of Symmetrically Laminated Thin Elastic Shallow Shells (oai:ltrs.larc.nasa.gov:NASA-90-tm102716) Nondimensional parameters and equations for Buckling of Symmetrically Laminated Thin Elastic Shallow Shells (oai:ltrs.larc.nasa.gov:NASA-91-tm104060)	0.980	Suspected metadata error.
3	Development of Pneumatic Channel Wing Powered-Lift Advanced Super-STOL Aircraft (oai:ltrs.larc.nasa.gov:NASA-aiaa-2002-2929) Pneumatic Channel Wing Powered-Lift Advanced Super-STOL Aircraft (oai:ltrs.larc.nasa.gov:NASA-aiaa-2002-3275)	0.9617	Same paper (or close match) submitted to two conferences having different identifiers.
4	Compendium of NASA Data Base for the Global Tropospheric Experiment's Pacific Exploratory Mission-Topics B(PEM-Tropics B)—Volume1:DC-8. (oai:ltrs.larc.nasa.gov:NASA-2000-tm210617vol1) Compendium of NASA Data Base for the Global Tropospheric Experiment's Pacific Exploratory Mission-Topics B(PEM-Tropics B)—Volume2:P-38. (oai:ltrs.larc.nasa.gov:NASA-2000-tm210617vol2)	0.958	Volume One and Volume Two of same report.
5	Computational Methods for Frictional Contact With Applications to the Space Shuttle Orbiter Nose-Gear Tire-Development of Frictional Contact Algorithm.(oai:ltrs.larc.nasa.gov:NASA-96-tp3573) Computational Methods for Frictional Contact With Applications to the Space Shuttle Orbiter Nose-Gear Tire-Development of Frictional Contact Algorithm.(oai:ltrs.larc.nasa.gov:NASA-96-tp3574)	0.956	Suspected metadata error.

6	A Cryogenic Magnetostrictive Actuator Using a Persistent High Temperature Superconducting Magnet, Part 1: Concept and Design.(oai:ltrs.larc.nasa.gov:NASA-2000-tm209139) A Cryogenic Magnetostrictive Actuator Using a Persistent High Temperature Superconducting Magnet, Part 1: Concept and Design.(oai:ltrs.larc.nasa.gov:NASA-99-6spiegch1)	0.950	Technical Report version of a conference paper.
7	International Space Station Evolution Data Book-Volume1.(oai:ltrs.larc.nasa.gov:NASA-2000-sp6109vol1rev1) International Space Station Evolution Data Book- Volume2 Evolution Concepts-Revision A.(oai:ltrs.larc.nasa.gov:NASA-2000-sp6109vol2rev1)	0.937	Volume One and Volume Two of same report.
8	A Model for Assessing the Liability of Seemingly Correct Software.(oai:ltrs.larc.nasa.gov:NASA-96-icai.jlr) A Model for Assessing the Liability of Seemingly Correct Software.(oai:ltrs.larc.nasa.gov:NASA-96-tm110247)	0.935	Technical Report version of a conference paper.
9	NASA's Atmospheric Effects of Aviation Project— Result of the August 1999 Aerosol Measurement Intercomparison Workshop, Laboratory Phase.(oai:ltrs.larc.nasa.gov:NASA-96-iasted.jmv) NASA's Atmospheric Effects of Aviation Project— Result of the August 1999 Aerosol Measurement Intercomparison Workshop, T-38 Aircraft Sampling Phase.(oai:ltrs.larc.nasa.gov:NASA-96-icrqcr-jmv)	0.935	Different phases of same project.
10	Integrated Orbit, Attitude and Structural Control Systems Design for Space Solar Power Satellites.(oai:ltrs.larc.nasa.gov:NASA-2001-tm210829) Integrated Orbit, Attitude and Structural Control Systems Design for Space Solar Power Satellites.(oai:ltrs.larc.nasa.gov:NASA-2001-tm111226)	0.928	Suspected metadata error.